

JENSEN®

VX4014 Software Update Procedure

Note: Software is not interchangeable between models. This update is for the **VX4014** head unit MCU only. All previous settings may be lost.


Items addressed with this update:

1. Adds TFT tilt function

Preparing the microSD card

Note: microSD card should be formatted FAT32 before update procedure. Use a 4GB or 8GB microSD card.

1. Unzip/Uncompress the software update folder. Place the update files into the ROOT directory of a blank, formatted microSD card.
2. There should be no folders or files on the microSD card except the files contained within the update files. See below image for reference.

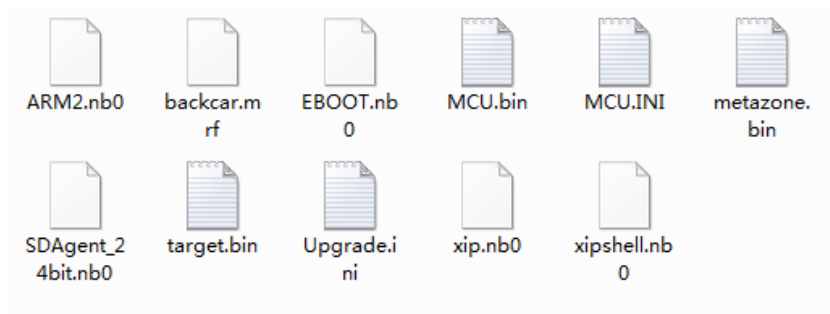

Beginning the Update

Note: When updating the unit, make certain that power is not interrupted while the update is in progress. If power is lost or interrupted the unit may become inoperable.


1. Turn OFF power of the head unit via the key for 15 seconds.
2. Insert the microSD Card with copied software.
3. Power ON the head unit.
4. The update process will begin automatically.

```
Update metazone.bin...Valid...Match...Successful!
Update EBOOT.nb0...Successful!
Update ARM2.nb0...Successful!
Update backcar.mrf...Successful!
Update target.bin...Successful!
Update xip.nb0...
Update xipshell.nb0...Successful!
Read successfully,Launch...
```


5. Wait approximately 1 minute for files to load and status bar to complete.

STEP 2


1. Tap MCU ARROW button.

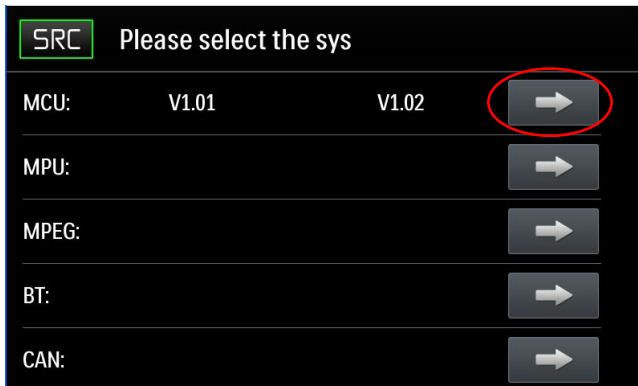

2. Tap NEXT

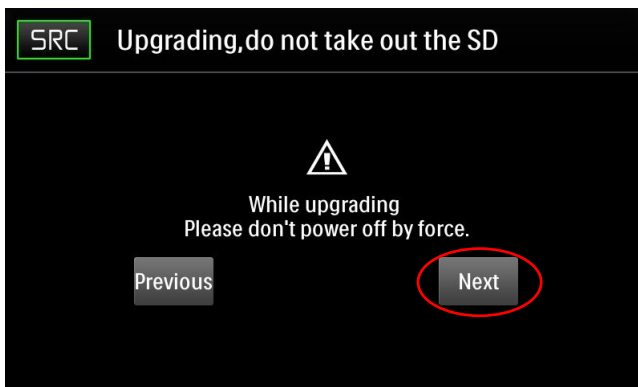

3. Update is now complete, remove SD Card.

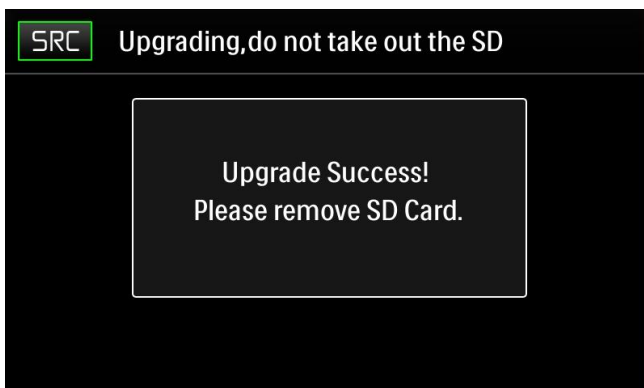

4. Go to the Settings Menu > Version. Check the version installed with the below parameters in ensure the update was successful.

Software Version Verification

Model: VX4014
MCU: v1.90 Nov 01 2018
MPEG: 01384200
SERV: e2010117
BT: 8.4
MPU: 1.0.05 00 2018-1-30
OS: v2.10-180502
Firmware: 1.0.1